

Transceiver Uplink Module 17-21 & 27-30 GHz

KKa-TR-UL-1929


Integrated transceiver uplink module for K/
Ka-band frequencies.

Overview

KKa-TR-UL-1929 is a fully integrated stand-alone transceiver module designed for K/
Ka-band communications systems. This transceiver operates as a wideband up/down converter designed for either on ground segment or an airborne environment. It includes an on-board frequency synthesizer and low power consumption in a stackable enclosure. This transceiver offers up to 2.5 GHz of instantaneous bandwidth.


It also includes a high-precision clock for LO generation; this clock can be used as a reference for other modules, or lock to an external system reference.

This transceiver can be used as a stand-alone up/down converter or combined with a modem/Software Defined Radio (SDR) enabling full-function K/Ka-band satellite communication.

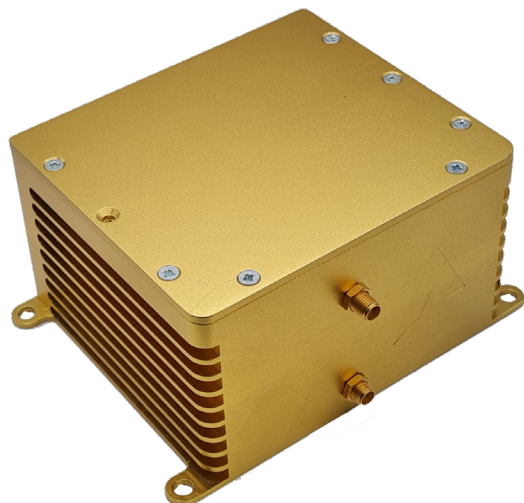

Features

- TX output frequency 27-30 GHz
- RX input frequency 17-21 GHz
- TX IF frequency 1-4 GHz
- RX IF frequency 1-5 GHz



Applications

- High speed data communications
- Space communications
- IOT
- Security
- 5G

Transceiver Uplink Module 17-21 & 27-30 GHz

Specification Overview

Transmitter

Parameter	Typical	Unit
TX Output Frequency Range	27-30	(GHz)
TX Output Linear Power	20	(dBm)
IF Input Frequency Range	1-4	(GHz)
IF Input Power	-10 to 0	(dBm)
Reference Frequency	100 (on-board or external)	(MHz)
Reference Phase Noise	-145	(dBc/Hz)
Reference Signal Characteristics	Square input: 0.6 Vpp (min) / 2.5 Vpp (max) - slew rate >0.5 V/ns Sine wave: +5 dBm (min) / +15 dBm (max)	
Reference Stability	5	(PPM)
Conversion Gain	30 (extended 50 dB with SSPA)	(dB)
Gain Flatness Over typical channel bandwidth from SDR (250 MHz)	3 (specified over max channel bandwidth (250 MHz) across entire 4 GHz RX bandwidth. (SDR input channel band)	(dB)
Typical Phase Noise		(dBc/Hz)
	1 kHz	-70 (dBc/Hz)
	10 kHz	-80 (dBc/Hz)
	100 kHz	-100 (dBc/Hz)
	1 MHz	-123 (dBc/Hz)
	10 MHz	-140 (dBc/Hz)
Spurious	-60	(dBc)
Supply Voltage Range	6-42	(Vdc)
DC Current	<1.5	(Amps)
DC Power	<6	(Watts)

Receiver

Parameter	Typical	Unit
RX Input Frequency Range	17-21	(GHz)
RX Input Power Range	-90 to -30	(dBm)
IF Output Frequency Range	1-5	(GHz)
IF Output Power Range	-60 to 0	(dBm)
Reference Frequency	100 (on-board or external)	(MHz)
Reference Phase Noise	-145	(dBc/Hz)
Reference Signal Characteristics	Square input: 0.6 Vpp (min) / 2.5 Vpp (max) - slew rate >0.5 V/ns Sine wave: +5 dBm (min) / +15 dBm (max)	
Reference Stability	5	(PPM)
Conversion Gain	30 (extended 50 dB with SSPA)	(dB)
Gain Flatness Over Typical Channel Bandwidth from SDR (250MHz)	3 (specified over max channel bandwidth (250 MHz) across entire 4 GHz RX bandwidth. (SDR input channel band)	(dB)
Typical Phase Noise		(dBc/Hz)
	1 kHz	-70 (dBc/Hz)
	10 kHz	-80 (dBc/Hz)
	100 kHz	-100 (dBc/Hz)
	1 MHz	-123 (dBc/Hz)
	10 MHz	-140 (dBc/Hz)
Spurious	-60	(dBc)
Noise Figure	<2.5	(dB)
Supply Voltage Range	6-42	(Vdc)
DC Current	<1.5	(Amps)
DC Power	<6	(Watts)

Transceiver Uplink Module 17-21 & 27-30 GHz

Mechanical and Environmental

Mechanical

Parameter	Typical	Unit
PCB Dimensions	80 x 80 x 2 (max)	(mm)
Mechanical Enclosure Required	Yes	
Mechanical Enclosure Dimensions	100 x 120 x 70 (max)	(mm)
Total Mass	<2	(kg)
Form Factor Requirement	Enclosure	
Enclosure Material Requirement	>2.54 mm Aluminium	(mm)
Enclosure Plating Requirement	Gold	
RF Connector Types	2.92	(mm)
DC Connector Types	DC feedthrough or alt. high rel. panel mount	
IF Signal Connector Types	SMA	


Environmental

Parameter	Typical
Operating Temperature Range	-40 °C to +70 °C
Storage Temperature Range	-40 °C to +85 °C
Operating Environment	Terrestrial; IP65 enclosures standard
Vibration Requirement	MIL-STD-810
Compliance Standards	1) ETSI EN 301 459 2) ETSI EN 301.489-12 (EMC standard for satellite earth stations)


Transceiver Uplink Module 17-21 & 27-30 GHz

Simplified Schematic Diagram

DOWN-CONVERTER (Gain 30dB)

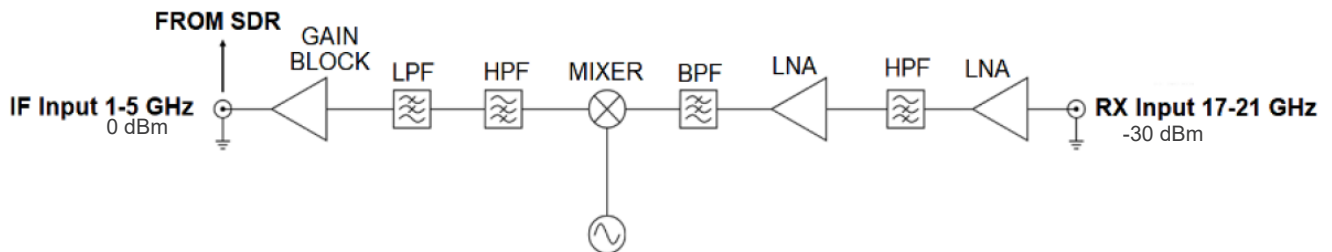

UP-CONVERTER (Gain 30dB)

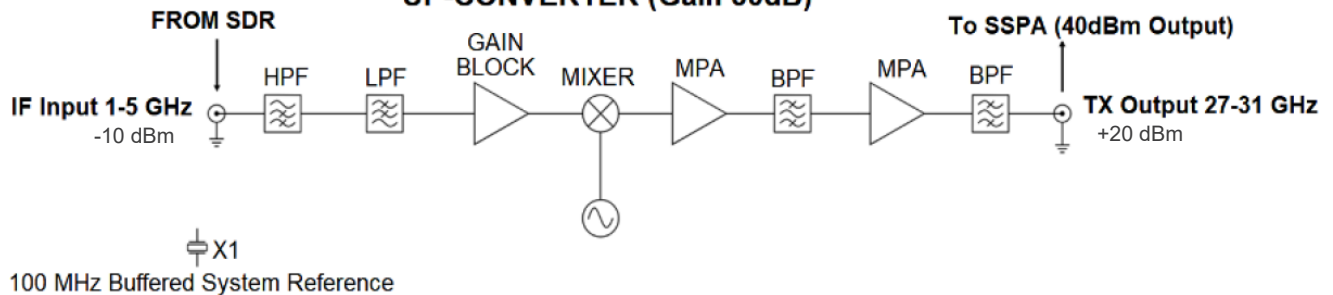

Transceiver Uplink Module 17-21 & 27-30 GHz



Disclaimer

The information contained herein is believed to be reliable; however, Arralis makes no warranties regarding the information and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information is subject to change without notice, therefore customers should obtain the latest relevant information before placing orders for Arralis products.

The information contained herein does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights. This information does not constitute a warranty with respect to the product described, and Arralis disclaims any and all warranties either expressed or implied, relating to sale and/or use of Arralis products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right.

Without limiting the generality of the foregoing, Arralis products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

©2022 Arralis Ltd. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.

Arralis European Offices

Arralis Space Office

e: sales@arralis.com

www.arralis.com

e: emilie.wren@arralis.us